

01 28 00

A



DOCKET NO. : MQPP-0002

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE



In Re Application of:

Timothy L. Blucher

Serial No.: Not Yet Assigned

Group Art Unit: Not Yet Assigned

Filing Date: Herewith

Examiner: Not Yet Assigned

For: CONTOUR FIT PAN LINER FOR A FOOD SERVICE PAN

EXPRESS MAIL LABEL NO: EL 219 290 971 US
DATE OF DEPOSIT: January 27, 2000

Box ☒ Patent Application
☐ Provisional ☐ Design

Assistant Commissioner for Patents
Washington DC 20231

Sir:

PATENT APPLICATION TRANSMITTAL LETTER

Transmitted herewith for filing, please find

☒ A Utility Patent Application under 37 C.F.R. 1.53(b).


It is a continuing application, as follows:

☐ continuation ☐ divisional ☐ continuation-in-part of prior application number
____/____.

☐ A Provisional Patent Application under 37 C.F.R. 1.53(c).

☐ A Design Patent Application (submitted in duplicate).

Including the following:



☐ Provisional Application Cover Sheet.

☒ New or Revised Specification, including pages 1 to 25 containing:

☒ Specification

☒ Claims

☒ Abstract

☐ Substitute Specification, including Claims and Abstract.

☐ The present application is a continuation application of Application No. _____ filed _____. The present application includes the Specification of the parent application which has been revised in accordance with the amendments filed in the parent application. Since none of those amendments incorporate new matter into the parent application, the present revised Specification also does not include new matter.

☐ The present application is a continuation application of Application No. _____ filed _____, which in turn is a continuation-in-part of Application No. _____ filed _____. The present application includes the Specification of the parent application which has been revised in accordance with the amendments filed in the parent application. Although the amendments in the parent C-I-P application may have incorporated new matter, since those are the only revisions included in the present application, the present application includes no new matter in relation to the parent application.

☐ A copy of earlier application Serial No. _____ Filed _____, including Specification, Claims and Abstract (pages 1 - @@), to which no new matter has been added TOGETHER WITH a copy of the executed oath or declaration for such earlier application and all drawings and appendices. Such earlier application is hereby incorporated into the present application by reference.

☐ Please enter the following amendment to the Specification under the Cross-Reference to Related Applications section (or create such a section) : "This Application:

☐ is a continuation of ☐ is a divisional of ☐ claims benefit of U.S. provisional Application Serial No. _____ filed _____

-
-
- ☐ Signed Statement attached deleting inventor(s) named in the prior application.
- ☐ A Preliminary Amendment.
- ☐ 16 Sheets of ☒ Formal ☐ Informal Drawings.
- ☐ Petition to Accept Photographic Drawings.
- ☐ Petition Fee
- ☒ An ☒ Executed ☐ Unexecuted Declaration or Oath and Power of Attorney.
- ☐ An Associate Power of Attorney.
- ☐ An ☐ Executed ☐ Copy of Executed Assignment of the Invention to _____
- ☐ A Recordation Form Cover Sheet.
- ☐ Recordation Fee - \$40.00.
- ☐ The prior application is assigned of record to _____
- ☐ Priority is claimed under 35 U.S.C. § 119 of Patent Application No. _____
filed _____ in _____ (country).
- ☐ A Certified Copy of each of the above applications for which priority is claimed:
- ☐ is enclosed.
- ☐ has been filed in prior application Serial No. _____ filed _____.
- ☒ An ☒ Executed or ☐ Copy of Executed Earlier Statement Claiming Small Entity Status under 37 C.F.R. 1.9 and 1.27
- ☒ is enclosed.
- ☐ has been filed in prior application Serial No. _____ filed _____, said status is still proper and desired in present case.

- ☐ Diskette Containing DNA/Amino Acid Sequence Information.
- ☐ Statement to Support Submission of DNA/Amino Acid Sequence Information.
- ☐ The computer readable form in this application _____, is identical with that filed in Application Serial Number _____, filed _____. In accordance with 37 CFR 1.821(e), please use the ☐ first-filed, ☐ last-filed or ☐ only computer readable form filed in that application as the computer readable form for the instant application. It is understood that the Patent and Trademark Office will make the necessary change in application number and filing date for the computer readable form that will be used for the instant application. A paper copy of the Sequence Listing is ☐ included in the originally-filed specification of the instant application, ☐ included in a separately filed preliminary amendment for incorporation into the specification.
- ☐ Information Disclosure Statement.
- ☐ Attached Form 1449.
- ☐ Copies of each of the references listed on the attached Form PTO-1449 are enclosed herewith.
- ☐ A copy of Petition for Extension of Time as filed in the prior case.
- ☐ Appended Material as follows: _____ .
- ☒ Return Receipt Postcard (should be specifically itemized).
- ☐ Other as follows: _____

_____ .

FEE CALCULATION:

- ☐ Cancel in this application original claims _____ of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)


				SMALL ENTITY		NOT SMALL ENTITY	
				RATE	FEE	RATE	FEE
PROVISIONAL APPLICATION				\$75.00	\$	\$150.00	\$
DESIGN APPLICATION				\$155.00	\$	\$310.00	\$
UTILITY APPLICATIONS BASE FEE				\$345.00	\$345.00	\$690.00	\$
UTILITY APPLICATION; ALL CLAIMS CALCULATED AFTER ENTRY OF ALL AMENDMENTS							
	No. Filed	No. Extra					
TOTAL CLAIMS	27 - 20 =	7		\$9 each	\$63.00	\$18 each	\$
INDEP. CLAIMS	5 - 3 =	2		\$39 each	\$78.00	\$78 each	\$
FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM				\$130	\$	\$260	\$
ADDITIONAL FILING FEE					\$		\$
TOTAL FILING FEE DUE					\$486.00		\$

- ☒ A Check is enclosed in the amount of **\$486.00**.
- ☒ The Commissioner is authorized to charge payment of the following fees and to refund any overpayment associated with this communication or during the pendency of this application to deposit account 23-3050. This sheet is provided in duplicate.
- ☐ The foregoing amount due.
- ☒ Any additional filing fees required, including fees for the presentation of extra claims under 37 C.F.R. 1.16.
- ☒ Any additional patent application processing fees under 37 C.F.R. 1.17 or 1.20(d).
- ☐ The issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance.
- ☒ The Commissioner is hereby requested to grant an extension of time for the appropriate length of time, should one be necessary, in connection with this filing or any future filing submitted to the U.S. Patent and Trademark Office in the above-

identified application during the pendency of this application. The Commissioner is further authorized to charge any fees related to any such extension of time to deposit account 23-3050. This sheet is provided in duplicate.

SHOULD ANY DEFICIENCIES APPEAR with respect to this application, including deficiencies in payment of fees, missing parts of the application or otherwise, the United States Patent and Trademark Office is respectfully requested to promptly notify the undersigned.

Date: January 27, 2000



Frank T. Carroll, Esq.
Registration No. 42,392

Woodcock Washburn Kurtz
Mackiewicz & Norris LLP
One Liberty Place - 46th Floor
Philadelphia PA 19103
Telephone: (215) 568-3100
Facsimile: (215) 568-3439

WOODCOCK WASHBURN KURTZ
MACKIEWICZ & NORRIS LLP
ONE LIBERTY PLACE - 46TH FLOOR
PHILADELPHIA PA 19103
TELEPHONE: (215) 568-3100
FACSIMILE: (215) 568-3439

Applicant or Patentee: Timothy L. Blucher

Serial or Patent No.: Not Yet Assigned **Attorney's Docket No.:** MQPP-0002

Date Filed: Herewith

For: CONTOUR FIT PAN LINER FOR A FOOD SERVICE PAN

**STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS (37 CFR
1.9(d) and 1.27(c)) - SMALL BUSINESS CONCERN**

I hereby declare that I am:

- ☐ the owner of the small business concern identified below:
- ☒ an official empowered to act on behalf of the concern identified below:

NAME OF CONCERN: M&Q PLASTIC PRODUCTS, INC.

ADDRESS OF CONCERN: 1364 Welsh Road, Suite A-1, North Wales, PA 19454

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that: (1) the number of employees of the concern, including those of its affiliates, does not exceed 500 persons; and (2) the concern has not assigned, granted, conveyed, or licensed, and is under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who could not be classified as an independent inventor if that person had made the invention, or to any concern which would not qualify as a small business concern or a nonprofit organization under this section. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in the

- ☒ specification filed herewith, with title as listed above.
- ☐ application identified above.
- ☐ patent number identified above.

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights in the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

*NOTE: Separate statements are required for each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

FULL NAME:

ADDRESS:

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

FULL NAME:

ADDRESS:

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING
TITLE OF PERSON SIGNING
ADDRESS OF PERSON SIGNING

Mr. David J. Carlin
President
1364 Welsh Road, Suite A-1
North Wales, PA 19454

David J. Carlin, President
SIGNATURE

1/26/00
DATE

CONTOUR FIT PAN LINER FOR A FOOD SERVICE PAN

FIELD OF THE INVENTION

The present invention relates in general to the culinary arts, primarily to an improved pan liner for food service applications. More particularly, the present invention relates to a flexible contour fit pan liner that fits within a food service pan to form a barrier between food placed within the pan and the interior surfaces of the pan.

BACKGROUND OF THE INVENTION

Large food service pans for cooking, serving and storing food have been used for many years in commercial food service establishments. These pans can be used in food servers, such as steam tables, buffet tables, chill tables, salad bars, and the like, as well as used as chafing dishes in chafers. In these applications, the food service pans can contain multiple portions of food, allowing it to be served one portion at a time. These pans may be used to cook and heat food, for the storage of food, and/or as transfer pans to carry large portions of food to and from a serving area. Conventional metal (e.g., stainless steel) food service pans can include a variety of shapes, including rectangular and circular shaped pans having an open top. A flange typically extends around the circumference of the open pan top to hold the pan in the steam or buffet table, to provide a steam seal around a steam table, and/or to offer a convenient lifting and carrying point. When used in a steam table, buffet table, salad bar, or the like, the pan body (e.g., the food receptacle portion) and flange are typically dimensioned

so that the receptacle is received into an opening in the table or bar and is supported by its flange resting upon the edges of the table or bar opening.

Liners may be provided for these pans to keep food separate from the metal surfaces of the pan thereby improving food safety and quality, enhancing flavor and juiciness of foods, minimizing clean up time and resource consumption, and reducing shrinkage by allowing left over food to be removed from the pan and saved for further use. Pan liners are typically used in food preparation (cooking) and holding to prevent food from “baking-on” and “burning-on” to the pan surface.

Various types of flexible sheets, films, and liners have been devised in the past for preparing, cooking, and/or storing foods therein or in pans, trays, or the like provided with liners made from such sheets. For example, paper sheets of cellulosic fibers have been used, as well as various types of thermoplastic and thermosetting films. Moreover, thin metal foils, so-called tin foils, which are in reality thin sheets of aluminum, are extensively used for cooking, heating, and storing foods.

Various difficulties have arisen through the use of such sheets, films, and liners made therefrom. For example, metal foils are notoriously easy to crack and break, so that foods wrapped therein frequently are not fully protected by the foil. Such sheet liners and foil are not easy to wrap closely around irregularly shaped pans and the like, and are also easily damaged by serving utensils that may scrap along the surface of the liner. In addition, sheets or liners made from metallic materials are generally relatively expensive as compared to other types of liner materials.

While paper sheets are useful for a variety of culinary purposes, their moisture and air transmissibility allow rapid spoilage of food contained therein as well as soiling of the pan surface. In addition, paper liners are typically not suited for high temperature cooking applications and also tear easily.

Thermoplastic films with slightly greater durability, such as polyethylene films and the like, are used for preparing, cooking, and storing foods. However, a problem with conventional pan liners is that they typically do not conform to the shape and contour of the pan or food receptacle that they are use with. Flat sheet liners and also conventional bag-shaped liners do not always adequately cover the food holding surface of the pan interior. This can result in soiling of the pan thereby requiring time-consuming, difficult, and

expensive cleaning of the pan, thus defeating the purpose behind using a pan liner in the first place. Also, conventional liners that are not properly fitted to the pan can fall back into the pan and the food contained therein. These problems are especially true for sheet type plastic liners that have a substantially flat planar construction.

5 The most common bag-shaped liners have a substantially tubule shaped body sealed at a bottom end and open at an opposite top end. These liners are generally formed having substantially right angled corners formed where the side walls of the liner connect with the bottom end. Typically, a liner is disposed within the receptacle of the pan to line and cover an interior surface of the receptacle and the top portion of the liner is folded over the top
10 edge and flange of the pan such that the excess liner material skirts the flange and exterior surface of the receptacle.

A problem with conventional pan liners having a bag-like shape is that they typically include “dog ears, ears, or tails” that are formed during the construction of the liner. These “dog ears” are pockets that are formed in the corners of the liner at the closed bottom
15 end. The corners of conventional liners (e.g., where the bottom edge meets the side walls) are typically formed at right angles. “Dog ears” are problematic in that food can become trapped in this area of the liner leading to waste of the food caught in this area and also jeopardizing the quality and safety of the food. In addition, serving utensils can become caught on the “dog ear” which may disturb or tear the liner.

20 There is a need, therefore, for an improved food service pan liner, and method for making the improved pan liner. In particular, there is a need for a simple, flexible, replaceable, and durable pan liner having non-stick and high temperature attributes, that conform to the shape, size, and contour of the pan and food receptacle and that does not include the problematic “dog ears” found in conventional bag liners.

25 **SUMMARY OF THE INVENTION**

The present invention is directed to a contour fit pan liner, a contour fit pan liner system, and a method of making the contour fit pan liner for forming an improved barrier between the interior surfaces of a food service pan and food disposed therein. The contour fit liner of the present invention includes a generally tubular, or bag-like, shaped liner body
30 having a closed bottom end, one or more side walls extending upwardly from the closed

bottom end, and an open top end. The closed bottom end includes a contoured, or shaped, bottom edge that is constructed to custom fit the receptacle of a food service pan.

Preferably, the contoured bottom edge includes a flat bottom end and one or more contoured edges. Each contoured edge extends outward and upward from and opposite end of the flat bottom edge and is merged and joined with the flat bottom edge. Each
5 contoured edge is merged and joined at its opposite end with an edge of the side walls. The contour fit liner is then removably disposed within the receptacle of the pan. The closed bottom edge being disposed generally over the interior surface of a bottom panel of the food service pan, the liner side walls being disposed generally over one or more side walls of the
10 pan, and the top end and top opening extending upwardly beyond a top opening of the pan. The liner top end is folded outwardly over the pan top opening.

Preferably, each of the contoured edges can include a substantially straight tapered edge. Each of the tapered edges can be formed having a predetermined angle from a plane defined by the flat bottom edge, wherein the angle is predetermined based on the
15 shape and size of the pan. Alternatively, each of the contoured edges can include a curved edge. Each of the curved edges can be formed having a radius that is predetermined based on the shape and size of the pan.

The pan liner system of the present invention includes a food service pan and a contour fit pan liner for holding food within the pan and for forming an improved barrier
20 between the food and the interior surface of the food service pan. The pan includes a bottom panel, one or more side walls extending upwardly from the bottom panel, a pan top opening defined by the one or more side walls, and a flange extending outwardly from an upper end of the one or more side walls.

The contoured fit pan liner is preformed having a generally tubule shape body
25 having a closed bottom end, one or more upwardly extending side walls, and an open top end. The closed bottom end includes a contoured or shaped bottom edge that is disposed generally over the interior surface bottom panel of the pan. The one or more side walls are disposed generally over the one or more side walls of the pan. An opening is formed by the one or more liner side walls at the top end of the liner. The top end extends upwardly beyond the top
30 opening of the pan and the liner can be folded outwardly over the top edge of the pan. The

contour fit pan liner does not have dog ears formed proximate the closed bottom end, as is typical of conventional bag-type pan liner.

Preferably, the contour fit pan liner is removably disposed within the pan. This allows left over or unused food to be removed by lifting out the liner and storing the food for
5 future use.

Preferably, the pan liner is made from a high temperature plastic material, such as a high temperature nylon resin material. The liner material should be suitable for food cooking and food preparation. Preferably, the high temperature liner can withstand a temperature of about 400°F.

10 Another embodiment within the scope of the present invention is directed to a method for making a pan liner having a contour fit for forming an improved barrier over an interior surface of a food service pan. The method includes providing two overlying sheets of plastic liner material, forming a substantially tubular shaped liner defining a food holding vessel between the overlying sheets of liner material by, closing a bottom end, the closed
15 bottom end preferably including a flat bottom edge and two contoured edges extending outward and upward from the flat bottom end, wherein each of the contoured edges closes off a dog ear portion of the tubular shaped liner, closing one or more side walls formed by the overlying sheets of liner material extending upward from the closed bottom end, the side wall being closed along one or more side wall edges extending upward from each of the contoured
20 edges, and forming an open top end defined by a top edge of the side walls of the liner.

The method can further include forming a perforation along each of the sealed contoured edges on the dog ear side of the sealed contoured edge. The perforation can allow for easy removal of the material of the dog ear prior to using the liner. In addition, the method can include removing the dog ears formed by the contoured edges on a side of the sealed
25 contoured edge opposite the tubular shaped liner. The material of the dog ear can be removed by, for example, cutting the dog ear off during the manufacturing process.

The method can further include forming each of the contoured edges having a tapered edge that extends outward and upward from opposite ends of the flat bottom edge at a predetermined angle from a plane defined by the flat bottom edge, the angle being
30 predetermined based on a shape and a size of the pan. Alternatively, the method can include forming each of the contoured edges having a curved edge that extends outward and upward

from opposite ends of the flat bottom edge and a predetermined radius of curvature, the radius of curvature being predetermined based on a shape and a size of the pan.

The edges of the contour fit liner can be closed by sealing the edges using one of heat or thermo-sealing, impulse-sealing, sonic-sealing, and RF-sealing. Alternatively, other
5 suitable conventional techniques can be used to close the liner edges, such as bonding, adhesion, etc.

A further embodiment within the scope of the present invention is directed to a method of forming an improved barrier between an interior surface of a food service pan and the food that is disposed within the food service pan. The method includes providing a pan
10 having a bottom, one or more side walls extending upwardly from the bottom, and an opening defined by an upper edge of the side walls, disposing a liner having a contoured or shaped body including a closed bottom end, one or more side walls extending upwardly from the bottom end, and an opening defined by an upper edge of the liner side walls, and folding the
upper edge of the liner side walls over the pan upper edge. Preferably, the closed bottom end
15 includes a flat bottom edge and one of more contoured edge connecting opposite ends of the flat bottom edge to one or more edges of the side walls. The contour fit liner forms an improved barrier between the pan and food disposed therein because the contour fit liner does not include dog ears, which are typical of conventional bag-shaped liners. The dog ears are closed off or eliminated by the contoured edge of the closed bottom end.

20 BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other aspects of the present invention will become apparent from the following detailed description of the invention when considered in conjunction with the accompanying drawings. For the purpose of illustrating the invention, there is shown in the drawings embodiments that are presently preferred, it being understood, however, that the
25 invention is not limited to the specific methods and instrumentalities disclosed. In the drawings:

Figure 1 is a perspective view of an exemplary pan liner system in accordance with the present invention;

Figure 2 is an exploded perspective view of the pan liner system of Figure 1;

Figure 3 is a cross sectional view of the pan liner system of Figure 1 taken along sectional line 3-3;

Figure 4 is a perspective view of another exemplary pan liner system in accordance with the present invention;

5 Figure 5 is an exploded perspective view of the pan liner system of Figure 4;

Figure 6 is a cross sectional view of the pan liner system of Figure 4 taken along sectional line 6-6;

Figure 7 is a schematic view of standard pan sizes and corresponding liner sizes that can be used with the pan liner system of Figure 1;

10 Figure 8A is a front perspective view of an exemplary contour fit pan liner in accordance with the present invention;

Figure 8B is a top view of the contour fit pan liner of Figure 8A;

Figure 9 is a front perspective view of another exemplary contour fit pan liner in accordance with the present invention;

15 Figure 10 is a front perspective view of another exemplary contour fit pan liner in accordance with the present invention;

Figure 11 is a front perspective view of another exemplary contour fit pan liner in accordance with the present invention;

20 Figure 12 is a front perspective view of another exemplary contour fit pan liner in accordance with the present invention;

Figure 13 is a flow diagram of an exemplary method of making the contour fit pan liner of the present invention;

Figure 14A is a front view of an exemplary dispensing system for the contour fit pan liner in accordance with the present invention; and

25 Figure 14B is a side view of the exemplary dispensing system of Figure 14A.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The present invention is directed to a pan liner having a contour fit, a pan liner system having a pan and contour fit pan liner for forming an improved barrier between the pan and food disposed therein, and a method for making the contour fit pan liner. The contour fit
30 pan liner is used primarily with food service pans and functions to hold food within the pan

receptacle and to form a barrier between the interior surfaces of the pan and food that is disposed therein. The contour fit pan liner has a substantially tubular or bag shaped body which is formed without dog ears, which are typical of conventional bag shaped pan liners. The pan liner is formed having a contoured bottom edge which provides an improved fit of the liner to the pan and also helps prevent food from becoming trapped in the bottom corners of the liner, because these corners have been closed off or eliminated by the contoured bottom edge. In addition, serving utensils no longer become caught in these corner areas of the pan liner, again because these corners have been eliminated by the contoured bottom edge. This helps maintain the integrity of the barrier formed by the liner between the metal surface of the pan and food that may be placed in the pan. The contour fit pan liner thereby improves food safety and helps maintain food quality, reduces shrinkage, and also reduces labor costs and resource consumption.

Figures 1 through 6 show an exemplary food service pan liner system in accordance with the present invention which uses a high temperature pan liner having a contour fit to form an improved barrier between the food service pan and food which may be disposed within the pan. As shown in Figures 1 through 6, each exemplary pan liner system 2 including a pan 3 and a contour fit liner 20. The flexible pan liner 20 is removably disposed inside the pan 3 such that it covers an interior surface of the pan 3 and holds food (not shown) that can be disposed within the pan 3. The closed bottom end of the liner 20 is constructed having a contoured or shaped bottom edge which provides an improved or to custom fit of the liner 20 to a pan or receptacle thereby minimizing the problems associated with conventional pan liners which do not properly fit within the pan and which have dog ears formed at the right angle corners of the liner bottom. The liner 20 is generously sized in relation to the pan 3 such that the open top end of the liner 20 can be folded outwardly over the top edge of the pan 3 top opening. After use, the liner 20, and any remaining food, can be removed from the pan 3, and the liner 20 can be used to store the remaining food for future used.

Figures 1 through 7 show exemplary pans 3. As shown, pan 3 includes a bottom panel 4, one or more side walls 5 extending upwardly from bottom panel 4, and a pan top opening 6 defined by top edges 7 of the one or more side walls 5. The pan bottom 4 and side walls 5 define a receptacle 8 that is constructed to receive and hold multiple servings of food (not shown) that can later be served a single-serving at a time. The pan 3 also preferably

includes a flange 9 extending outwardly from top edge 7 of each of the side walls 5 and terminating at an outer edge 10. The flange 9 provides a convenient lifting and carrying point and provides a ledge for holding the pan 3 in, for example, a steam or buffet table (not shown).

5 Pan 3 preferably includes a metallic material, preferably made of stainless steel, such as those currently used in the food service industry for food preparation (e.g., cooking), serving, and transport. Alternatively, the pan 3 can be made from any material that is suitable for high temperature food service applications, such as for example, glass, plastics, ceramics, etc. The pan 3 can be removably positioned in, for example a steam table, a buffet
10 table, a chafer, or mounted in some other holder.

An exemplary metal pan 3 can be formed from an initially flat sheet of metal by one or more draws between a punch and die to have a perimetric wall structure 5 and an outwardly-extending flange 9 at the top 7 thereof.

Figures 1 through 3 show an exemplary rectangular shaped pan liner retention
15 system. As shown in Figures 1, 2, and 3, the rectangular pan 3a includes a rectangular shaped planar bottom panel 4, front 5a, rear 5b, first, or right 5c, and second, or left 5d side walls extending upwardly from bottom panel 4. The front 5a, rear 5b, right 5c, and left 5d side walls are joined and merged together at corners 11a. The side walls 5a, 5b, 5c, 5d are joined to and merged with bottom panel 4 at corners 11b. Preferably, corners 11a, 11b are formed
20 as curved, or rounded corners.

As shown, each side wall 5a, 5b, 5c, 5d terminates at top edge 7, and the top edges 7 define the top opening 6, which is generally rectangular in shape, with the possible exception of the corners, which may be curved. Flange 9 extends outwardly from top edge 7 around the entire periphery of the side walls 5a, 5b, 5c, 5d. Flange 9 is joined to and merged
25 with side walls 5a, 5b, 5c, 5d at corners 15. Preferably, corners 15 are formed as curved, or rounded corners.

As shown, flange 9 can include a substantially continuous planar surface that is constructed to be in intimate, uninterrupted contact with an upper surface of a steam, or buffet, table (not shown) that the pan may be placed in contact with. The interface between
30 the pan flange 9 and the steam table preferably forms a seal between the pan and the steam

table. The flange 9 terminates in an outer edge 10. Preferably, the flange 9 defines a plane that is substantially parallel with a plane defined by the bottom panel 4.

In an alternative embodiment (not shown), the flange can include an upper flange portion extending outwardly and upwardly (e.g., having a radius forming a curved or arching structure), terminating in a lower flange portion. The lower flange portion can be formed as a substantially continuous planar surface that is constructed to be in intimate, uninterrupted contact with an upper surface of a steam, or buffet, table that the pan may be placed in contact with. The interface between the pan flange and the steam table preferably forms a seal between the pan and the steam table. The lower flange portion terminates in an outer edge. Preferably, the lower flange portion defines a plane that is substantially parallel with a plane defined by the bottom panel.

Figures 4 through 6 show an alternative exemplary circular shaped pan liner retention system. As shown, the circular pan 3b can include a circular shaped planar bottom panel 4, a perimetric wall structure 5e extending upward from the circular shaped bottom panel 4, and with an outwardly-extending top flange 9. The flange 9 can be constructed having a similar design as described herein above for the rectangular pan embodiment (e.g., a substantially flat planar flange or a flange having an upper flange portion and a lower flange portion).

Preferably, these pans 3 come in standard shapes and sizes, although custom sizes may be constructed, such that the pan is usable for its intended purpose. For example, the pan's shape can include rectangular, square, triangular, circular, etc. Preferably, the pans include standard food service pans having standard sizes (e.g., L x W x H), such as those shown in Figure 7.

For example, exemplary commercially available pans 3 can include, a hotel pan, a half size, a third size, a sixth size, etc., as shown in Figure 7. These pans 3 can have a generally rectangular configuration as shown in more detail in Figures 1 through 3. As shown, the rectangular pan 3 including front 5a, rear 5b, right 5c and left 5d side walls extending upwardly from a substantially planar bottom 4, with a top flange 9 extending outwardly from a top edge 7 of the walls 5. Corners 11a join each of the adjacent side walls 5 and corners 11b join each of the side walls 5 to the bottom 4. Preferably, but not necessarily, the corners 11a, 11b are formed as curved, or rounded, corners.

Table 1 shows some standard pan sizes used in industrial and commercial kitchens.

Table 1: Standard Size Pans.

	Pan Description	Pan Size (LxW)	Pan Depth (H)
5	Half Pan-Shallow	12.8" x 10.4"	2.5"
	Half Pan-Medium & Deep	12.8" x 10.4"	4" & 6"
	Third & Quarter Pan-Medium & Deep	12.8" x 6.9"	4" & 6"
	Third & Quarter Pan-Shallow	12.8" x 6.9"	2.5"
	Sixth Pan	6.4" x 6.9"	6"
10	Hotel Pan-Shallow & Medium	12.8" x 20.8"	2.5" & 6"
	Hotel Pan-Deep	12.8" x 20.8"	6"
	2 Quart Round		8.2"
	4 Quart Round		8.2"
	6 & 7 Quart Round		8.2"
15	9 & 11 Quart Round		8.2"
	Bun Sheet Pan	18.5" x 26.5"	n/a
	G.I. Roasting Pan	20" x 17"	6.5"
	Large Roasting Pan	25.5" x 17.5"	4"

Although described and shown with reference to an exemplary pan (e.g., rectangular), the scope of the present invention contemplates the use of the pan liner system 2 with other cooking and food storage devices, including for example, pots, trays, containers, kettles, bowls, and the like. These cooking, transportation, and storage devices (e.g., pans) can have a variety of shapes and sizes. Preferably, the cooking, transportation, and storage devices are standard sizes and shapes that are currently used within the food service industry. Alternatively, custom sizes can be manufactured and used. The liner can be sized accordingly to cover the interior surface of the cooking device and to have excess material that can be folded over the top edge of the pan.

Referring back to Figures 1 through 6, the pan liner system 2 includes a removable, flexible, high temperature, plastic liner 20 that is disposed within the pan 3 to cover an interior

surface 12 of the pan 3. The pan liners 20 is provided to keep food separate from the interior surfaces 12 of the pan 3 thereby improving food safety and quality, enhancing flavor and juiciness of foods, minimizing clean up time, pan washing and resource consumption, reducing shrinkage by allowing left over food to be removed from the pan and saved in the
5 liner for further use, etc. Pan liner 20 can be used in food preparation, cooking, and holding to prevent food from “baking-on” and “burning-on” to the pan surface.

As shown in Figures 1 through 6 and in more detail in Figures 8 through 12, the exemplary liner 20 includes a preformed substantially tubule, or bag-like, shaped body 21. The body 21 includes a closed bottom end 22, one or more upwardly extending side walls 26,
10 and an open top end 23. The closed bottom end 22 is formed having a contoured or shaped bottom edge 24 that is constructed to fit within and conform to the shape of the pan 3 and food receptacle 8. The bottom contoured edge 24 is preferably contoured or customed shaped to the particular pan or receptacle.

The contour bottom edge 24 eliminates, closes, or seals off the dog ear, ears, or tails
15 25 that are typical of conventional pan liners proximate the corner areas formed between the bottom edge and the side walls. The dog ears, ears, or tails 25 of the liner can be eliminated by either sealing or bonding the side walls together, as shown, thereby closing off the dog ear portion 25 of the liner 20. The unused (e.g., closed off) material of the dog ear 25 can be left in place on the liner, or it can be removed at some time prior to using the liner 20.

20 One or more flexible side walls 26 extend upwardly from the contoured bottom edge 24, and an opening 27 is formed at the opposite top end 23 by a top edge 29 of each of the side walls 26. The one or more side walls 26 are connected together, preferably along one or more sealed edges 30.

The closed contoured bottom edge 24 and the upwardly extending side walls 26 define
25 a food holding vessel 31 capable of fitting within a pan and holding a volume of food that may be disposed therein. Preferably, the liner 20 is generously sized to afford complete coverage of the receptacle 8 (e.g., the food contact area) of each pan 3 and allows an excess portion 32 of the liner 20 proximate the top end 23 to be folded outwardly over the top edge 7 and flange 9 of pan 3, as best shown in Figures 2, 3, 5, and 6.

Although some forming may occur once the liner 20 has been disposed within a pan 3, such as moisture adhesion and thermal-forming as the pan is heated, the liner 20 is preferably substantially preformed having a closed bottom end 22 and upwardly extend sidewalls 26 which define the food holding vessel 31 which fits within and covers the interior surface 12 of the pan 3. In addition, the weight of the food may also exert some pressure on the liner which also helps to further form the pan liner to the pan.

Figures 8A, 8B, and 9 show the bottom contoured edge 24 having a flat bottom edge 33 and one or more contoured or shaped edges 34. Each contoured edge 34 extends outward and upward from the flat bottom edge 33 and joins and merges an opposite end of the flat bottom edge 33 with one or more of the side wall edges 30. As shown, the liner 20 is formed having two side walls 26 that can be sealed or joined together using conventional techniques thus forming on or more sealed side wall edges 30. The closed bottom end 22 can be closed by using conventional techniques, such as for example, sealing, bonding, adhesion, or the like. For example, the entire contoured bottom edge 24 can be formed by a conventional sealing technique, or preferably, the flat bottom edge 33 can be formed by folding over a single flat sheet of plastic material such that the folded edge forms the flat bottom edge 33. The contoured edges 34 can then be closed using conventional sealing or bonding techniques.

Figure 8A shows the bottom contoured edge 24 having a flat bottom edge 33 and one or more contoured or shaped edges 34, wherein the contoured edges 34 include one or more tapered, or sloped, edges. Each tapered edge 34 extends outward and upward from the flat bottom edge 33 and joins and merges an opposite end of the flat bottom edge 33 with one or more of the side wall sealed edges 30. The tapered edges 34 form an angle θ from a plane defined by the flat bottom edge 33. The angle θ is predetermined and can vary based on the particular application and the shape and size of the pan 3 that the contour fit liner 20 will be used in. Preferably the angle θ forms an angle between about 40 and about 55 degrees.

Figure 8B shows a top view of the exemplary contour fit pan liner 20 of Figure 8A. As shown, the liner 20 includes two side walls 26 that extend upward from the contoured bottom edge 24. The two side walls 26 are joined or connected together at seal edges 30.

Figure 9 shows the contoured bottom edge 24 having a flat bottom edge 33 and one or more contoured or shaped edges 34, wherein the contoured edges 34 include one or more

rounded or curved edges. Each rounded or curved edge 34 extends outward and upward from the flat bottom edge 33 and joins and merges an opposite end of the flat bottom edge 33 with one or more of the side wall edges 30. The rounded edges 34 form a radius R from a point within in the food holding vessel 31 of the contour fit liner 20. The radius R is predetermined and can vary based on the particular application and the shape and size of the pan that the contour fit liner will be used in.

In addition, the width W1 of the flat bottom edge 33 can also vary in length and is predetermined based on the particular application and the shape and size of the pan. Preferably, the width W1 would increase as the pan size increases and the width W would decrease as the pan size decreases. For example, for an exemplary conical shaped pan, the contour fit liner can be formed with a minimal, or no, flat bottom edge 33, such that the contour edge 24 includes two contoured or shaped edges 34 that connect together at one end and connect and join the side wall edges 30 at the opposite end, such as for example, the tapered edges 34 as shown in Figure 10.

Figures 8, 9, and 10 show pan liners having a contoured bottom edge 24 wherein the dog ears 25 have been removed. Alternatively, the dog ears 25 can be left on and never removed, or left on until just prior to using the liner 20, at which time the dog ears 25 can be removed. Figure 11 shows an exemplary liner 20 having a contoured bottom edge 24 wherein the dog ears 25 are still attached to the liner 20. The flat bottom edge 33, the tapered edges 34, and the side walls 26 have been closed to form a vessel 31 capable of holding food. The material of the dog ears 25 is not used and food cannot enter that area because it has been closed, or sealed, by the tapered edges 34.

Figure 12 show a liner 20 having a contoured bottom edge 24 including a perforation 35 formed parallel along each of the sealed contoured edges 34 on the dog ear side of the sealed contoured edge 24. The perforated edge 35 can be made using a cutting device to make a plurality of serially aligned cuts, or slots in a line that is substantially parallel to the contoured edge 34 and on the dog ear side of the contoured edge 34. These perforations 35 allow the dog ears 25 to be easily removed either after the manufacturing process or just prior to use.

Preferably, a standard size contour fit liner 20, fitted to a standard size pan, is disposed within the receptacle 8 of the pan 3 to line and cover an interior surface 12 of the receptacle 8 and the top edge 29 and the excess portion 32 of the liner 20 are folded over the top edge 7 and flange 9 of pan 3 such that the excess liner material 32 skirts the flange 9 and exterior surface 13 of pan 3.

The liner 20, like the pan 3, can include a variety of shapes and sizes. Preferably, the shape and size of the liner 20 correspond to the shape and the size of the pan 3 that the liner 20 will be used with. Preferably, the pans include standard food service pans having standard sizes and the liners include standard size liners (L x H), such as those shown in Figure 7.

Referring back to Figure 7, shown are standard pan sizes for rectangular shaped pans 3 used in industrial and commercial kitchens and corresponding exemplary pan liner sizes that can be used with the present invention. As can be seen from Figure 7, the pan liners are generously sized in comparison to the corresponding pan size. This ensures adequate coverage of the pan receptacle and also provides excess liner material proximate the open top end of the liner. This excess liner material 32 at the top end 23 can be folded outwardly over the top edge 7 and flange 9 of pan 3 such that the excess material 32 skirts the exterior surface 13 of the pan 3, as shown in Figures 1 and 3.

The liner material is preferably suitable for continuous service under various conditions and preferably has the following characteristics: suitable for temperature conditions ranging from about -100°F to about +400°F; has a good thermal heat transfer rate; has a tensile strength capable of withstanding approximately 13,000 psi without orientation; has a tear strength capable of holding up to about 50 grams/liter; has a tear strength capable of sustaining about 1000 cycles tested with a load of about 500 grams; has a chemical resistance to most chemicals, such as mineral acids, phenols and concentrated formic acid; has a bacterial and mold resistance making it rotproof and resistant to molds and impermeable to micro-organisms; acts as an odor barrier to most odors; has a grease and oil resistance having an oil-barrier properties effective against animal, vegetable, and mineral oils and fats; allows some moisture-vapor transmission at raised temperatures; is gas permeability which makes the liner well suited for packaging under nitrogen, carbon dioxide, or vacuum, and is resistant to oxygen permeation which reduces fogging in frozen foods and helps extend shelf-life; is

non-scalping (e.g., no flavor loss); and will not block (e.g., will not stick together). The contour fit pan liner is safe to use in most conventional cooking devices, such as ovens, microwaves, slow cookers, steamers, flat-tops, crock pots, pressure cookers, and the like.

Preferably, the liner 20 is made from a durable and high temperature plastic material or nylon film, such as a nylon resin. For example, the liner can be made from a high temperature nylon or polyester, such as a material from the polyamide family including nylon 3, 4, 6, 9, 11, 12, and triple nylons. An exemplary nylon resin material that is suitable for use with the present invention includes MONOLYN® material manufactured by M&Q Plastic Products, of North Wales, PA.

Figure 13 is a flowchart diagram showing an exemplary method of making the contour fit liner of the present invention for lining an interior surface of a pan/receptacle. As shown in Figure 13, a sheet of plastic material is provided at step 100. The plastic sheet material is folded over along its longitudinal length, at step 105. A sealing device is used to seal one or more side edges and the bottom contoured edge of the folded over material at step 110. This results in one or more contour fit liners having a sealed bottom end, one or more side walls extending upwardly from the bottom end, and an opening defined by an upper edge of the liner side walls.

The bottom contoured edge along the bottom end of the liner can include a variety of shapes depending on the application and the pan that the liner will be used with. As shown, the bottom contoured edge includes a flat bottom edge and two tapered or sloped edges. Each tapered edge is formed between and connecting an end of the flat bottom edge to a side wall edge. The sealing is preferably accomplished using conventional sealing techniques, such as for example, heat or thermo-sealing, impulse-sealing, sonic-sealing, RF-sealing, etc. This forms one or more contour fit pan liners. Alternatively, the edges can be closed using other conventional techniques, such as a bonding material, an adhesion, etc.

Alternatively, the contour fit pan liner resulting from the above steps 100-110 can be accomplished by overlying two separate sheets of material one over the other instead of folding over a single sheet of material. It is preferred to use the folded-over approach because this provides a closed edge along the fold line thereby forming the flat bottom edge, and thus less sealing is required.

Also, in an alternative embodiment (not shown), the contoured bottom edge could be formed using one or more folds proximate the closed bottom, such as a gusset.

A perforated edge can be formed at step 115 along each of the sealed contoured edges on the dog ear side of the seal away of the interior food holding portion of the liner. The
5 perforated edge can be formed using conventional techniques, such as using one or more blades to cut a plurality of serially-aligned slots in the liner material. Alternatively, the ears can be left on the contour fit liner and not used, or the dog ears can be cut and removed from the liner.

The individual contour fit liners can then be separated from one another at step 120
10 using a cutting device. Preferably, where multiple liners are made together, either two seals are formed parallel to one another during the sealing process, or a sufficiently wide seal is made to allow adjoining liner to be cut and separated from one another while still maintaining the seal edge along the edges of adjoining side walls.

As stated earlier, the dog ears can be left on the liner and not used. Preferably, the dog
15 ears 25 are removed at step 130 before the contour fit liner 20 is used in a pan 3 to form a barrier between the pan and food that is held in the food receptacle of the pan. The dog ears 25 can be removed during the manufacture process of the contour fit liner, or alternatively, just prior to use. Where the dog ears are left on and then removed just prior to use, a perforated edge 35 is preferably formed along the sealed contoured edge 34 to assist with the
20 removal of the dog ear 25.

For example, in one embodiment, the dog ears can be left on the liner after the manufacturing process and then removed by an end user of the liner just prior to use. To assist in the storage of the liners prior to use and to assist in the removal of the dog ears prior to use, a dispensing system 40 can be employed to hold and store a plurality of contour fit
25 liners 20 until they are used. The dispensing system 40 would preferably be constructed such that the dog ears are removed as each liner is removed from the dispensing system 40.

Figures 14A and 14B show an exemplary dispensing system 40 that can include a support structure 41 and a retaining structure 42, such as a wicket or the like. As shown in Figures 14A and 14B, the dispensing system 40 includes a support structure 41 having one
30 or more support members 43 that extend through an opening 44 formed in each of the dog ears

25 of the liners 20, and a retaining structure 42 having one of more stops 45 for holding the liners on the support members 43.

Preferably, the dispensing system 40 includes two support members 43 positioned proximate to and extending through a center region of each of the dog ears and a rear stop 45a and a front stop 45b positioned on opposite ends of each support member 43 to hold the pan liners therebetween. The rear stop 45a and the front stop 45b preferably are positioned on each of the support members 43 such that the plurality of liners are compressed therebetween with a compressive force sufficient to tear-off the dog ears 25 along the perforated edge 35 and hold the dog ears 25 in place in the dispensing system 40.

10 In another embodiment (not shown), the dispensing system 40 can also include a housing for holding the plurality of liners during shipment and storage of the individual liners prior to use. For example, the housing can include a card-board box like structure having a removable or selectively movably cover that can be opened to obtain an individual pan liner and then the cover could be replaced or closed until another pan liner is needed.

15 When a contour fit pan liner 20 is needed to cover an interior surface of a pan 3, the next liner in the dispensing system 40 can be grasped at the free end (e.g., the open top end 23 of the liner) and the liner 20 is pulled away from the dispensing system 40. This allows the liner to be removed leaving the dog ears 25 behind in the dispensing system 40.

Although described and shown with reference to an exemplary food service pan application, the scope of the present invention contemplates the use of the contour fit pan liner system with other applications, including for example, medical, environmental, automotive, chemical, hazardous waste, and the like. Preferably, the contour fit pan liners are constructed to fit standard sizes and shapes of pan or receptacles that are used within the particular industry and for the particular application within an industry. Alternatively, custom sizes can be manufactured and used.

Although illustrated and described herein with reference to certain specific embodiments, it will be understood by those skilled in the art that the invention is not limited to the embodiments specifically disclosed herein. Those skilled in the art also will appreciate that many other variations of the specific embodiments described herein are intended to be within the scope of the invention as defined by the following claims.

What is claimed is:

1. A pan liner system having a contoured or customed shaped liner that can be disposed over an interior surface of a pan for forming an improved barrier between said pan and food disposed therein, said pan liner system comprising:

a pan, said pan comprising:

a bottom panel;

one or more side walls extending upwardly from said bottom panel, said one or more side walls each having a top edge, said top edge defining a pan top opening;

a pan liner having a contour fit disposed within said pan to cover an interior surface of said pan, said contour fit pan liner comprising:

a contoured bottom edge forming a closed bottom end disposed over said pan proximate said bottom panel;

one or more flexible side walls extending upwardly from said bottom end, said side walls generally covering an interior surface of said pan;

an open top end, said top end extending upwardly beyond said pan top opening and said liner open top end being folded over said top edge of said one or more side walls of said pan; and

wherein said pan liner does not have dog ears formed proximate said closed bottom end.

2. The pan liner system of claim 1, wherein said contoured bottom edge further comprises a flat bottom edge and two contoured edges, wherein said flat bottom edge is joined and merged at each end with one of said contoured edges, and said contoured edges extend outward and upward from said flat bottom edge and are joined and merged at an opposite end with a side wall edge.

3. The pan liner system of claim 2, wherein each of said contoured edges comprises a substantially straight tapered edge.

4. The pan liner system of claim 3, wherein each of said tapered edges is formed having a predetermined angle from a plane defined by said flat bottom edge, wherein said angle is predetermined based on said shape and size of said pan.

5. The pan liner system of claim 2, wherein each of said tapered edges forms an angle of about 40 to about 55 degrees with a plane defined by said flat bottom edge.

6. The pan liner system of claim 2, wherein each of said contoured edges comprises a curved edge.

7. The pan liner system of claim 6, wherein each of said curved edges is formed having a radius that is predetermined based on said shape and size of said pan.

8. The pan liner system of claim 1, wherein said pan liner body is preformed having a generally tubule shape body having a closed bottom end and an open top end.

9. The pan liner system of claim 1, wherein said contour fit pan liner is removable disposed within said pan.

10. The pan liner system of claim 1, wherein said pan liner is a high temperature plastic material.

11. The pan liner system of claim 10, wherein said pan liner is a high temperature nylon resin material

12. The pan liner retention system of claim 10, wherein said high temperature liner can withstand a temperature of about 400°F.

13. A contour fit pan liner for forming a barrier between a food service pan and food disposed therein, said food service pan having a food receptacle defined by a bottom panel, one or more side wall extending upwardly from an outer edge of said bottom panel, and a top opening defined by a top edge of said pan side walls, said contour fit pan liner comprising:

a closed bottom end;

one or more side walls extending upwardly from said closed bottom end;

an open top end defined by a top edge of said side walls; and

wherein said closed bottom end comprises a contoured bottom edge constructed to conform to a shape and a size of said pan.

14. The contour fit pan liner of claim 13, wherein said contoured bottom edge further comprises a flat bottom edge and one or more contoured edges, said flat bottom edge being joined and merged at each of two ends with said contoured edges, said contoured edges extending outward and upward and being joined and merged with said side walls.

15. The contour fit pan liner of claim 14, wherein said contoured edges comprise substantially straight tapered edges shaped to correspond to a shape and a size of said pan.

16. The pan crown of claim 15, wherein said contoured edge of said liner extends outward and upward from said liner flat bottom edge at an angle that substantially corresponds to an angle formed by an intersection of said pan bottom panel and said pan side walls.

17. The contour fit pan liner of claim 14, wherein said contoured edges comprise curved edges shaped to correspond to a shape and a size of said pan.

18. The pan crown of claim 17, wherein said contoured edge of said liner extends outward and upward from said liner flat bottom edge forming a rounded edge having a radius of curvature that substantially corresponds to said intersection of said pan bottom panel and said pan side walls.

19. The contour fit pan liner of claim 13, wherein said contoured bottom edge is formed without any dog ears proximate said bottom edge and said side walls.

20. A method for making a pan liner having a contour fit for forming an improved barrier over an interior surface of a food service pan comprising:

providing two overlying sheets of plastic liner material;

forming a substantially tubular shaped liner defining a food holding vessel between said overlying sheets of liner material by;

closing a bottom end, said closed bottom end comprising a flat bottom edge and two contoured edges extending outward and upward from said flat bottom end, wherein each of said contoured edges closes off a dog ear portion of said tubular shaped liner;

closing one or more side walls formed by said overlying sheets of liner material extending upward from said closed bottom end, said side wall being closed along one or more side wall edges extending upward from each of said contoured edges; and

forming an open top end defined by a top edge of said side walls of said liner.

21. The method according to claim 20, further comprising removing said dog ears formed by said contoured edges on a side of said sealed contoured edge opposite said tubular shaped liner.

22. The method according to claim 20, further comprising forming a perforation along each of said sealed contoured edges on said dog ear side of said sealed contoured edge.

23. The method according to claim 20, further comprising forming each of said contoured edges having a tapered edge that extends outward and upward from said flat bottom edge at a predetermined angle from a plane defined by said flat bottom edge, said angle being predetermined based on a shape and a size of said pan.

24. The method according to claim 20, further comprising forming each of said contoured edges having a curved edge that extends outward and upward from said flat bottom edge and a predetermined radius of curvature, said radius of curvature being predetermined based on a shape and a size of said pan.

25. The method according to claim 20, wherein said sealing is accomplished using one of heat or thermo-sealing, impulse-sealing, sonic-sealing, and RF-sealing.

26. A method for making a pan liner having a contour fit for forming an improved barrier over an interior surface of a food service pan comprising:

providing a flat sheet of plastic liner material;

folding said liner material in half along a longitudinal length thereby forming a closed flat bottom edge along a folded edge; and

forming a substantially tubular shaped body defining a food holding vessel by sealing said liner material along one or more contoured edges and one or more side wall edges, each of said contoured edges extending outward and upward from said closed flat bottom edge and joining and merging with one of said side wall edges, said side wall sealed edges extending upward to an open top end.

27. A method for fitting a contour fit pan liner over an interior surface of a food service pan comprising:

providing a pan having a bottom panel, one or more side walls extending upwardly from said bottom panel, and a top opening defined by a top edge of said side walls;

custom fitting a contour fit pan liner over and interior surface of said pan by disposing a contour fit liner having a closed bottom end having a flat bottom edge and two contoured edges, one or more side walls extending upwardly from said contoured edges, and an open top end defined by a top edge of said liner side walls in said pan, wherein said liner does not have any dog ears proximate said closed bottom end; and

folding said open top end of said liner outwardly over said pan top opening.

Year	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099
1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	

ABSTRACT

An apparatus, system, and method for forming an improved barrier between a pan, such as a food service pan, and a substance, such as food, contained therein using a contour fit pan liner are provided. The apparatus includes a pan liner having a contoured bottom edge that is custom fit within a food service pan to cover an interior surface of the pan. The contoured edge of the pan liner conforms to the shape and size of the food service pan and does not have any dog ears, ears, or tails that are typical of conventional pan liner. The contour fit pan liner system includes a pan and a contoured or shaped liner for forming an improved barrier between an interior surface of the pan and food that can be disposed therein using a pan liner having a contoured bottom edge that is custom fit to the shape and size of the pan. The pan preferably includes a food service pan having a bottom panel, one or more side walls extending upwardly from the bottom panel, a top opening defined by top edges of the side walls, and a flange extending outwardly from the top edges of the side walls. The liner includes a bag shaped structure having a closed bottom end, a contoured bottom edge, one or more side walls extending upwardly from the contoured bottom edge, and a top opening defined by the top edges of the liner side walls. The contoured bottom edge does not have dog ears formed at the bottom corners of the liner, as is typically of conventional pan liners. The liner is disposed within the food receptacle area of the pan to cover the interior surface of the pan and the top of the liner is folded over the top opening of the pan. A method for making an improved contour fit pan liner having a contoured bottom edge is disclosed.

2

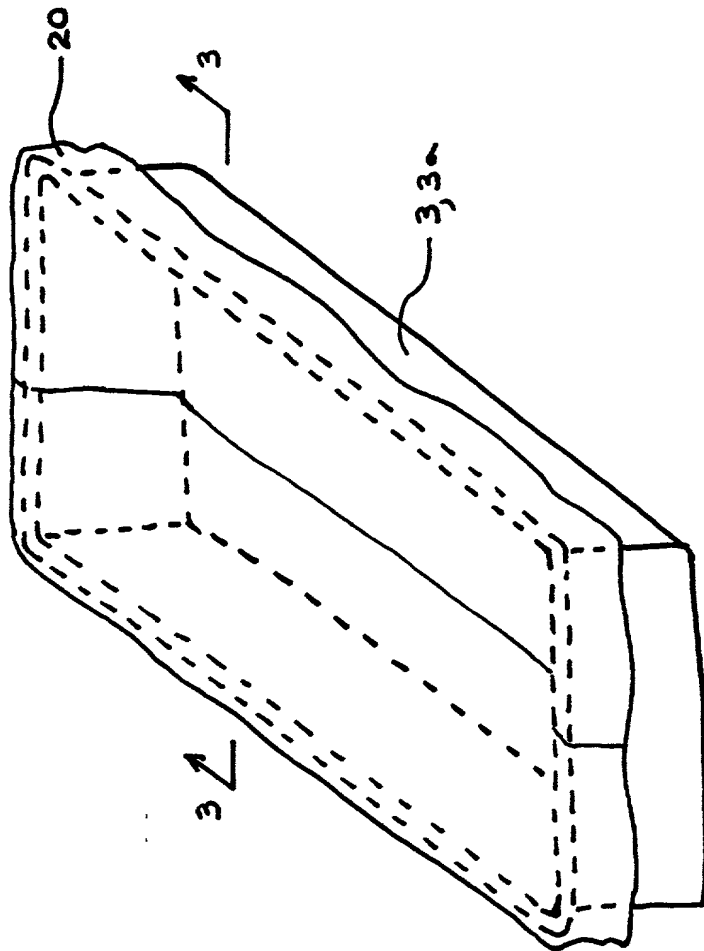


Figure 1

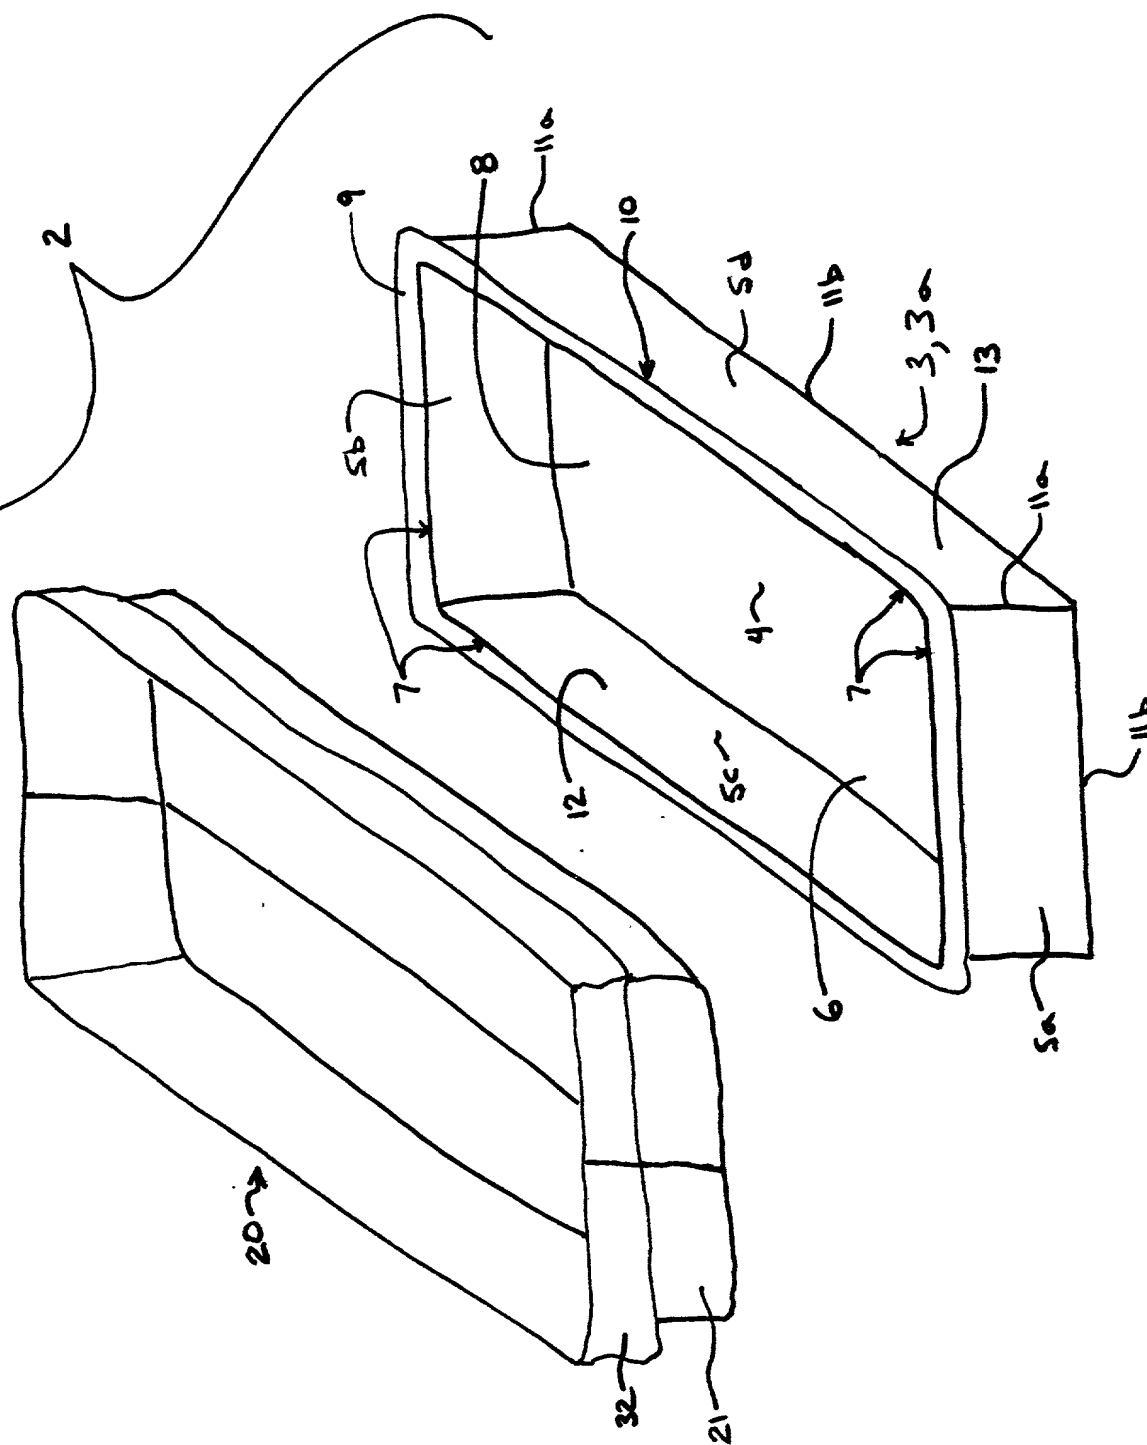


Figure 2

2

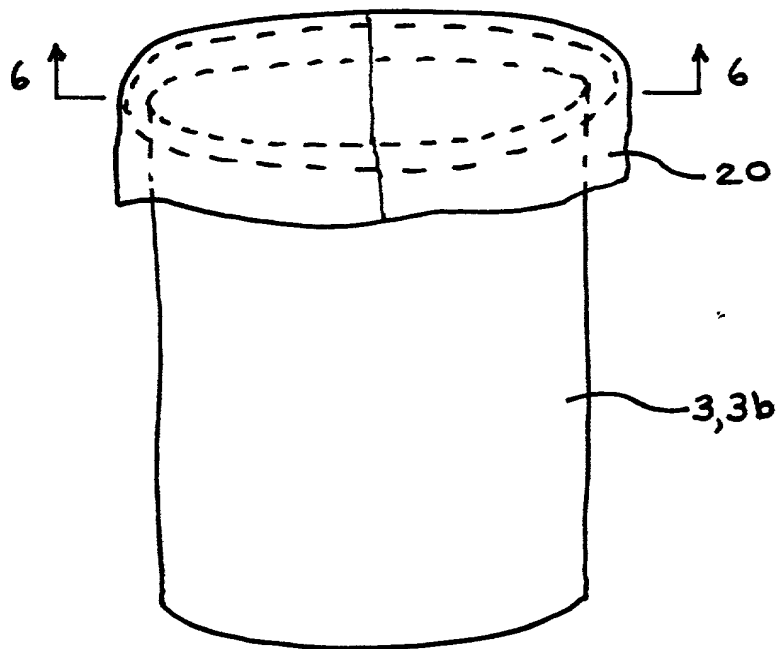


Figure 4

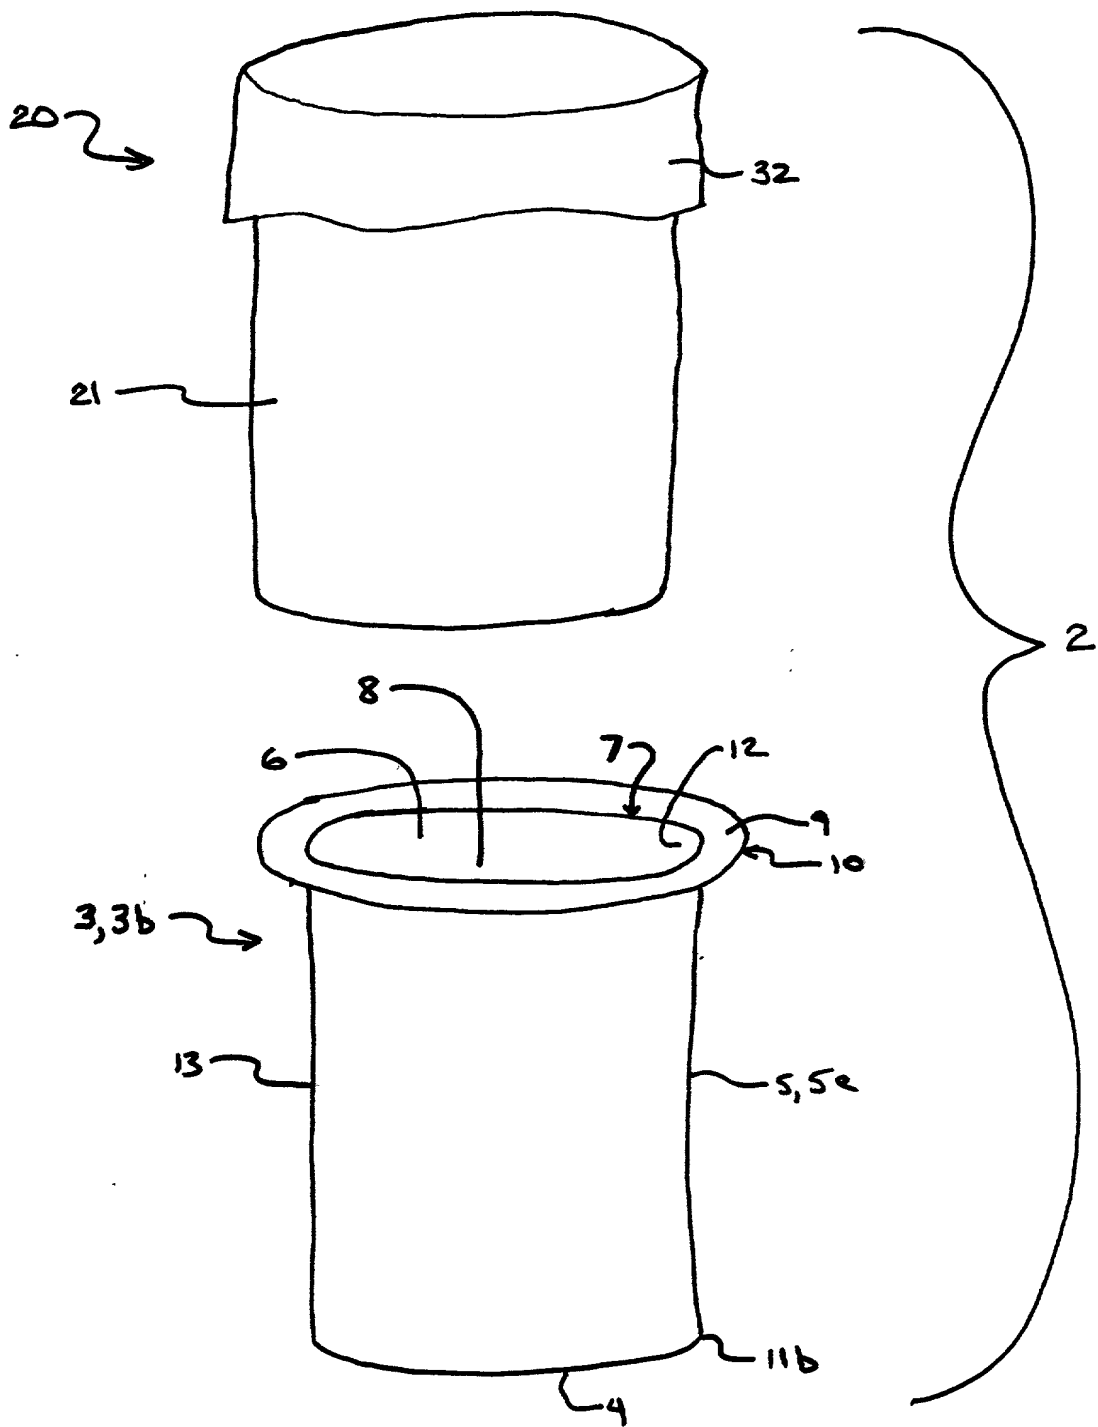


Figure 5

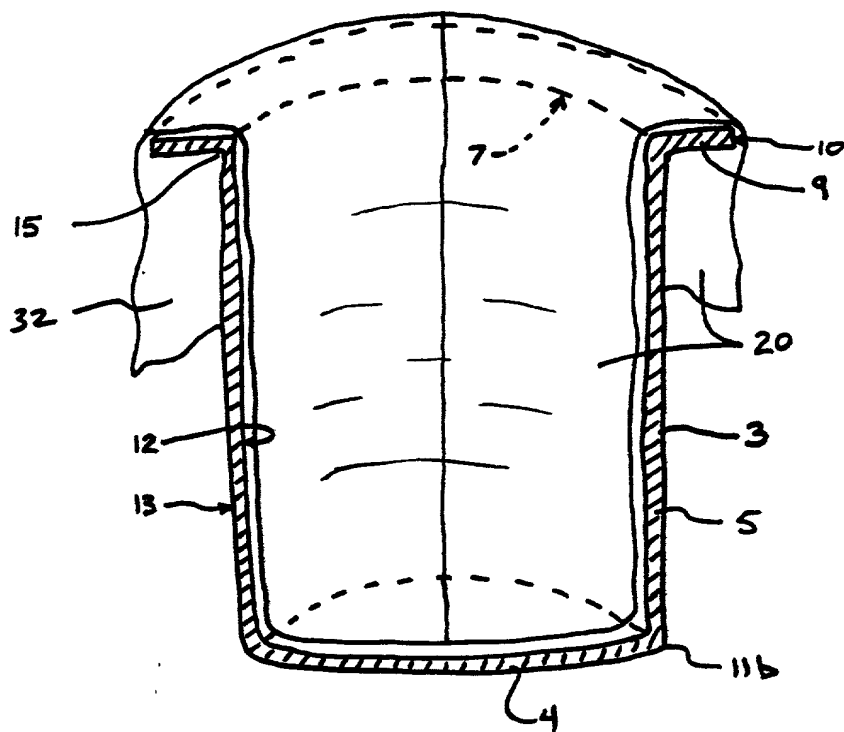



Figure 6



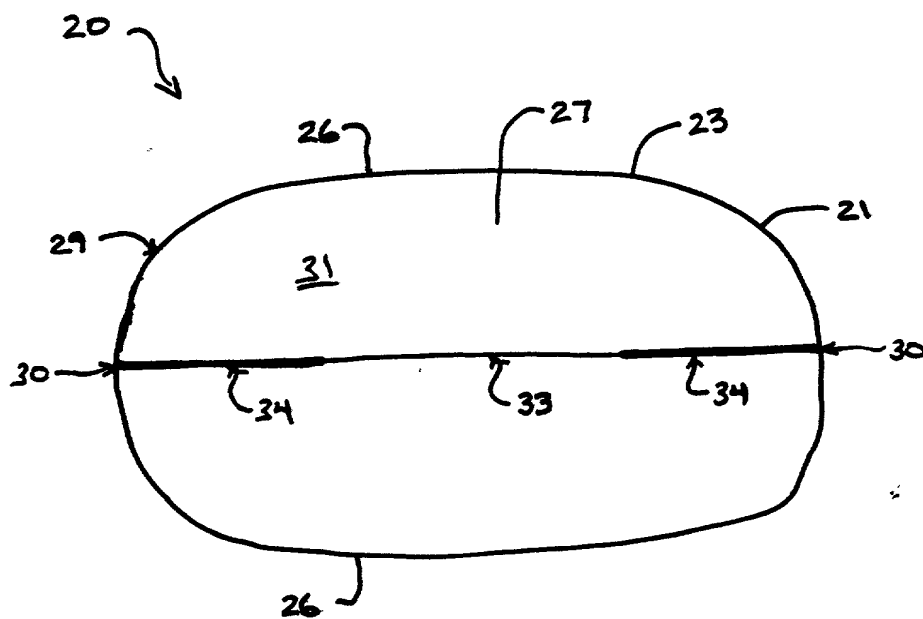


Figure 8B

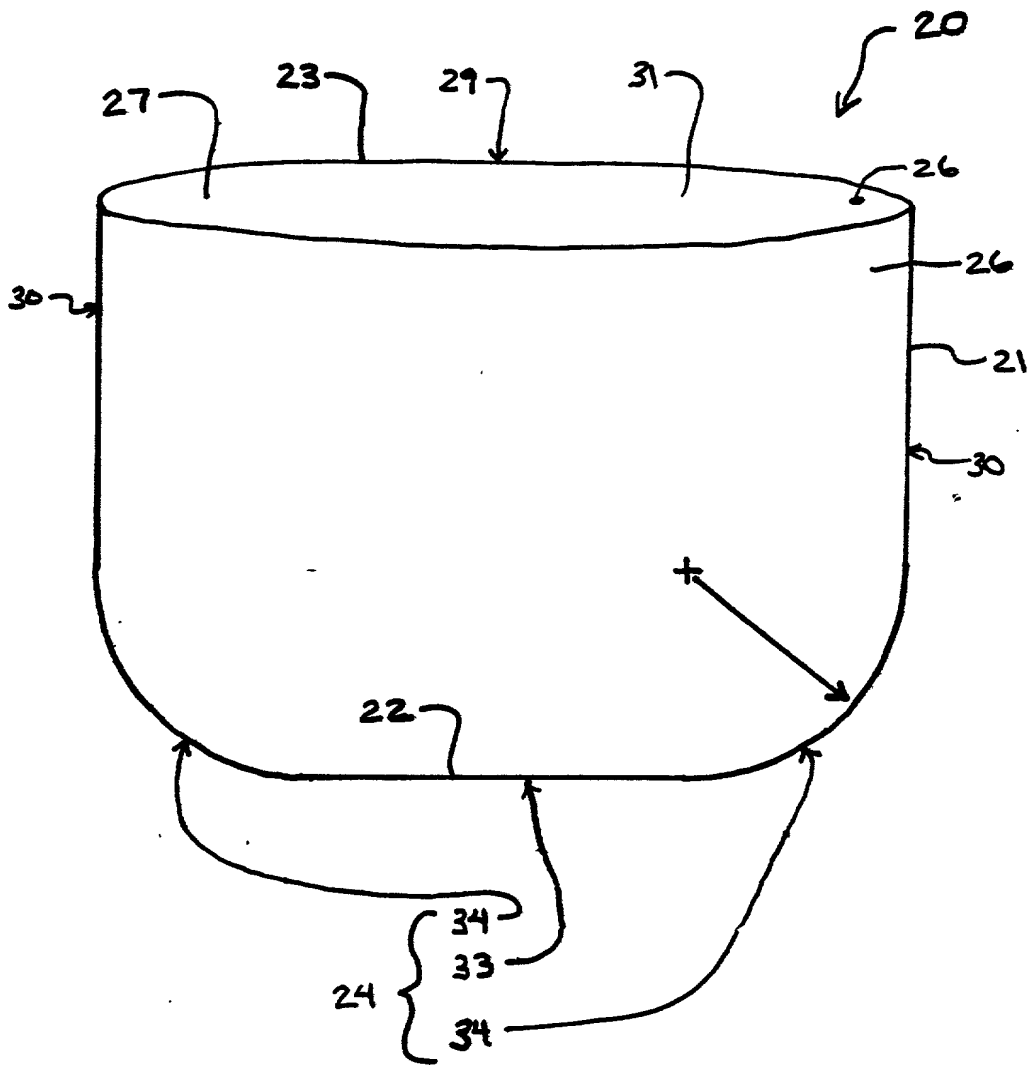


Figure 9

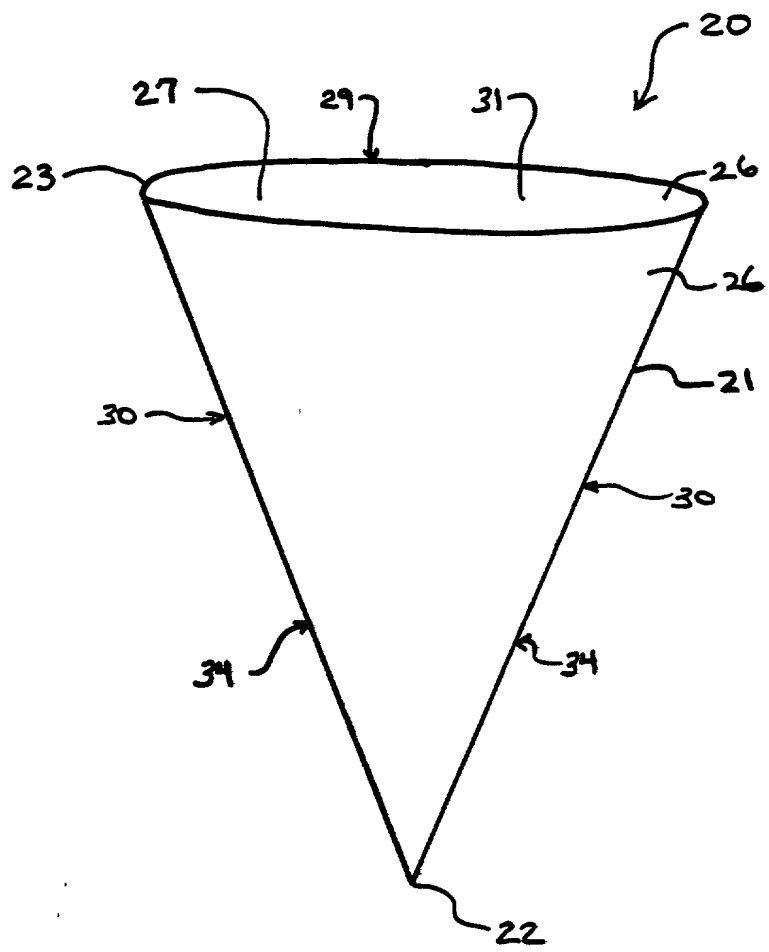


Figure 10

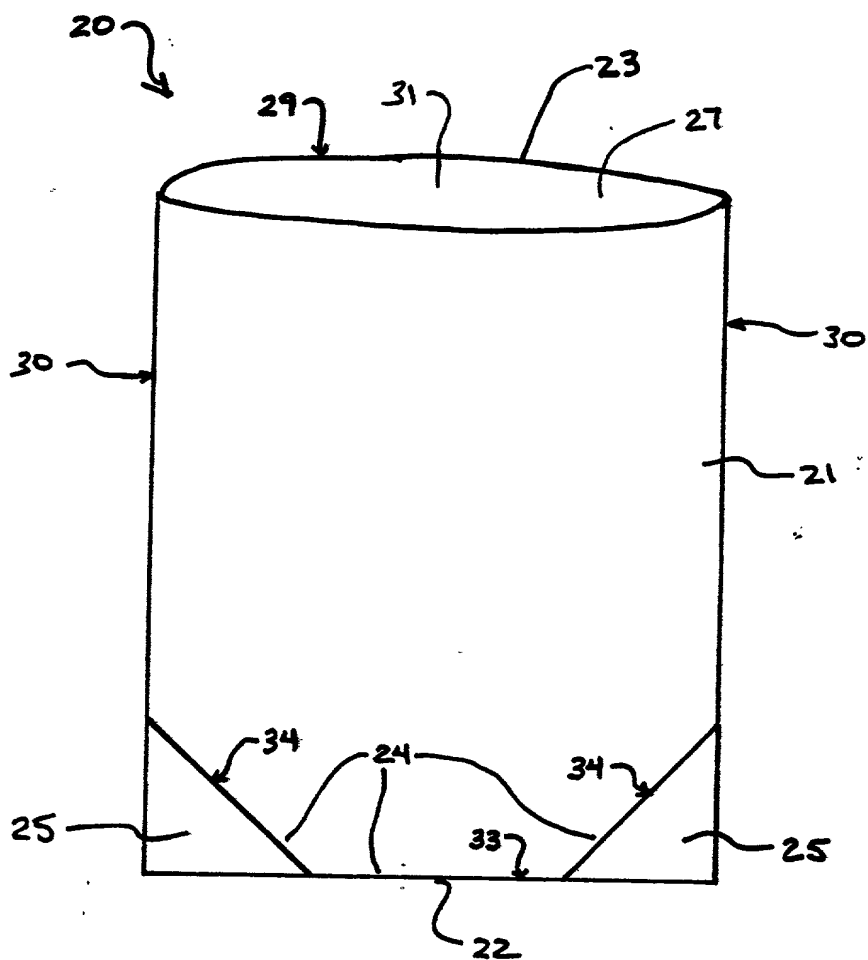


Figure 11

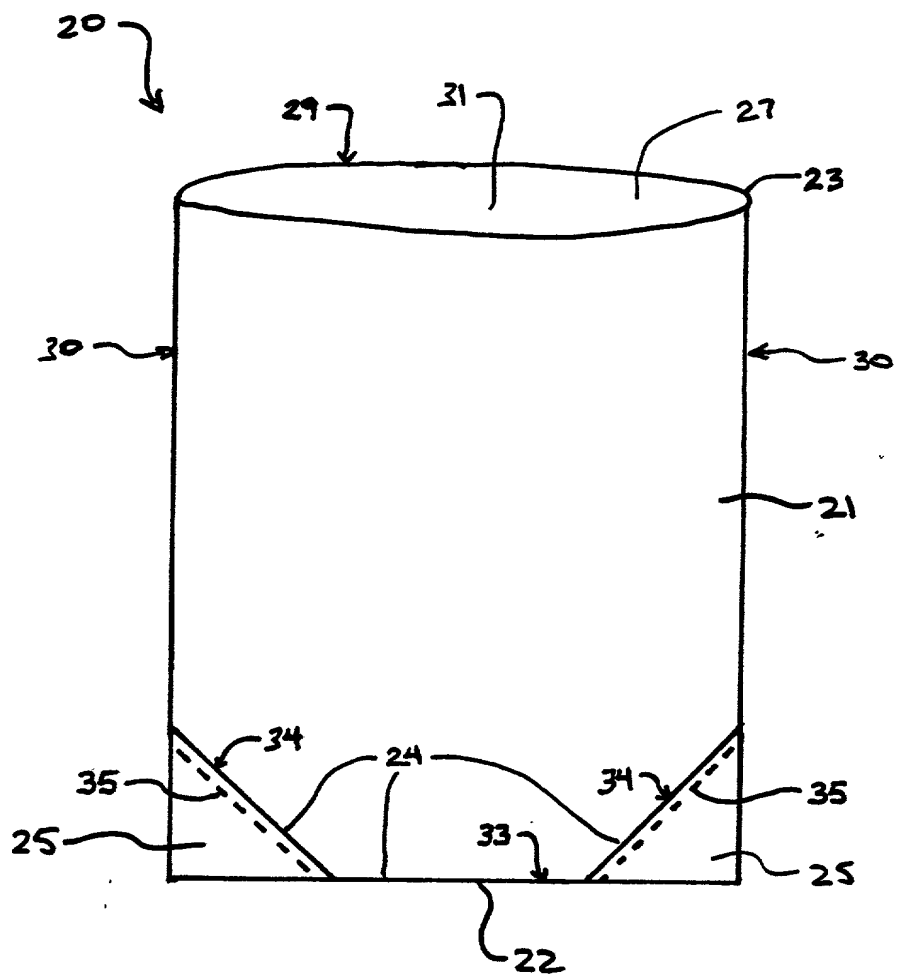


Figure 12

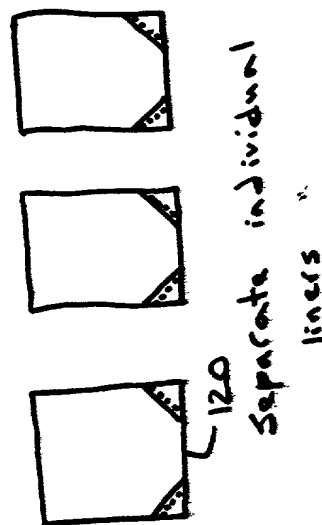
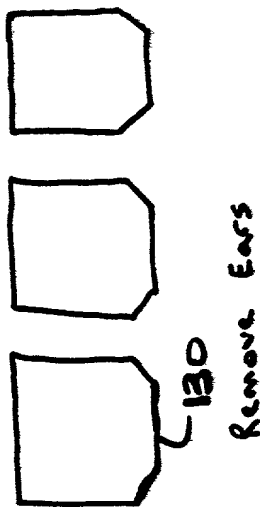
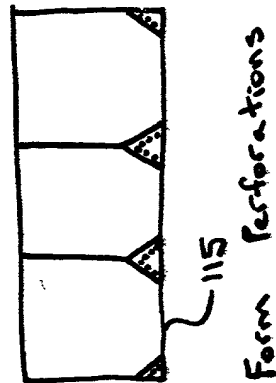
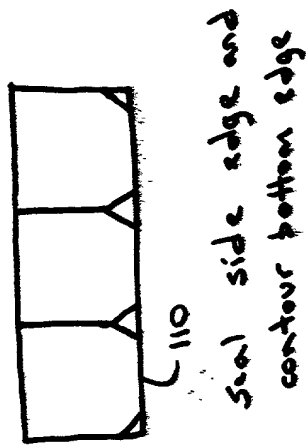
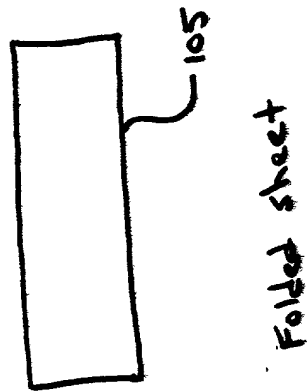
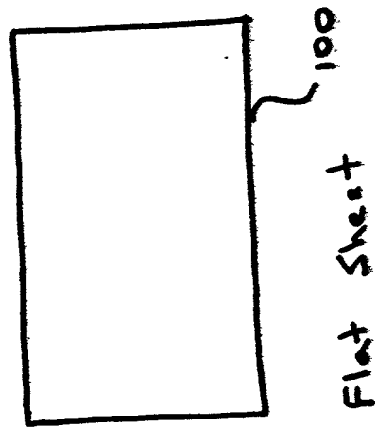


Figure 13

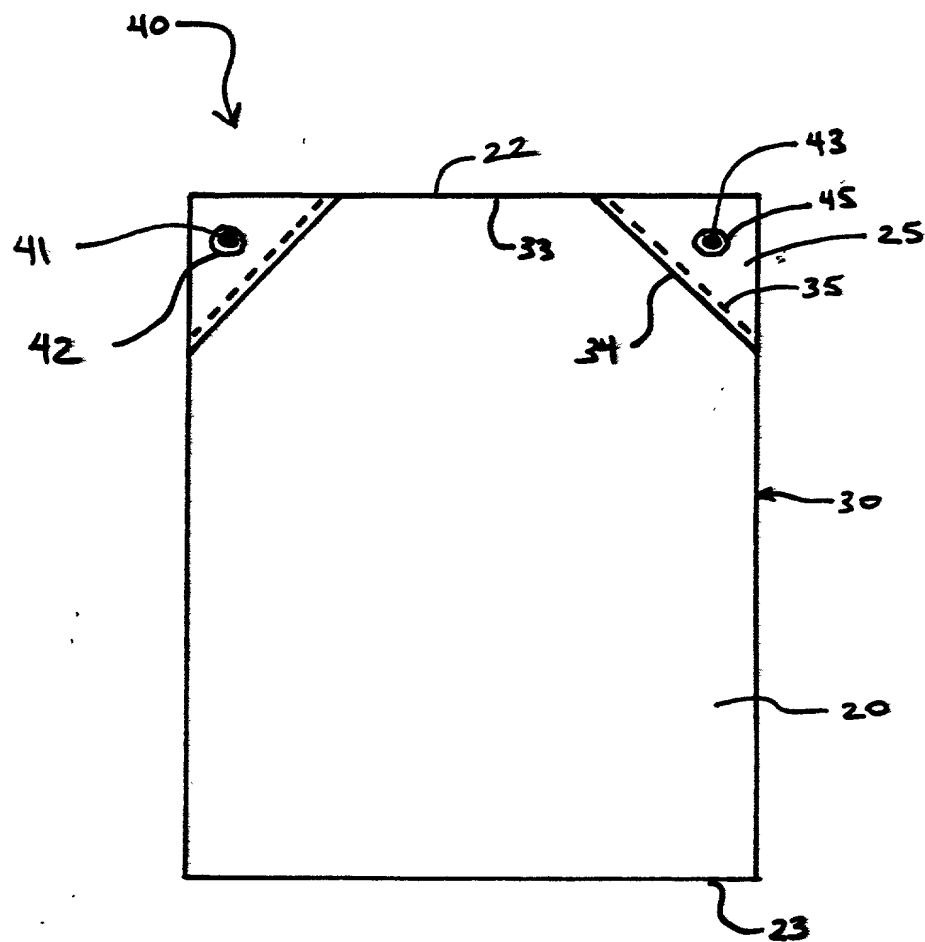


Figure 14A

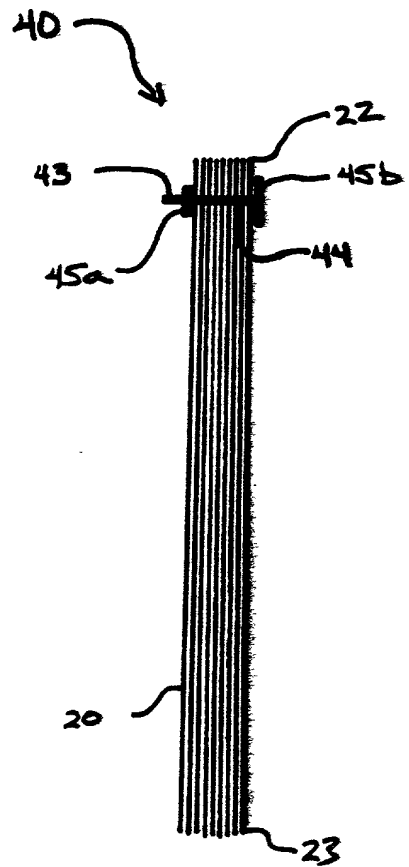


Figure 14B

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Application of:

Timothy L. Blucher

Group Art Unit: Not Yet
AssignedFor: CONTOUR FIT PAN LINER FOR A
FOOD SERVICE PAN

Examiner: Not Yet Assigned

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a

☒ Utility Patent ☐ Design Patent

is sought on the invention, whose title appears above, the specification of which:

☒ is attached hereto.

☐ was filed on _____ as Serial No. _____ .

☐ said application having been amended on _____ .

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to be material to the patentability of this application in accordance with 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a-d) of any **foreign application(s)** for patent or inventor's certificate listed below and have also identified below

any foreign application for patent or inventor's certificate having a filing date before that of any application on which priority is claimed:

Priority Claimed (If X'd)	Country	Serial Number	Date Filed
<input type="checkbox"/>	_____	_____	_____
<input type="checkbox"/>	_____	_____	_____
<input type="checkbox"/>	_____	_____	_____
<input type="checkbox"/>	_____	_____	_____

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to be material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number	Date Filed	Patented/Pending/Abandoned
_____	_____	_____
_____	_____	_____
_____	_____	_____
_____	_____	_____

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

Serial Number	Date Filed
_____	_____


I hereby appoint the following persons of the firm of **WOODCOCK WASHBURN KURTZ MACKIEWICZ & NORRIS LLP**, One Liberty Place - 46th Floor, Philadelphia, Pennsylvania 19103 as attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Dale M. Heist, Esq. Reg. No. 28,425
Michael K. Jones, Esq. Reg. No. 41,100

Address all telephone calls and correspondence to:

Michael K. Jones, Esq.
**WOODCOCK WASHBURN KURTZ
MACKIEWICZ & NORRIS LLP**
One Liberty Place - 46th Floor
Philadelphia PA 19103
Telephone No.: (215) 568-3100
Facsimile No.: (215) 568-3439

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name: Timothy L. Blucher	 Signature Date of Signature: <u>7/25/00</u> Citizenship: <u>United States</u>
Mailing Address: 571 Main Street Harleysville, PA 19438	
City/State of Actual Residence: Harleysville, PA 19438	